



## Periodically Changing the VersaLink Gateway SSID

To improve the security of your home network, you should change your home network's service set identifier (SSID) regularly. It is the SSID that identifies your wireless network when other devices try to connect to your network.

1. Open your Web browser and enter ***http://192.168.1.1*** in the **Address** field.

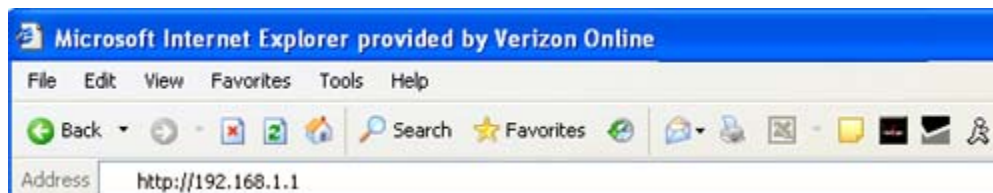

2. Select **Wireless** from the **Configuration** menu.

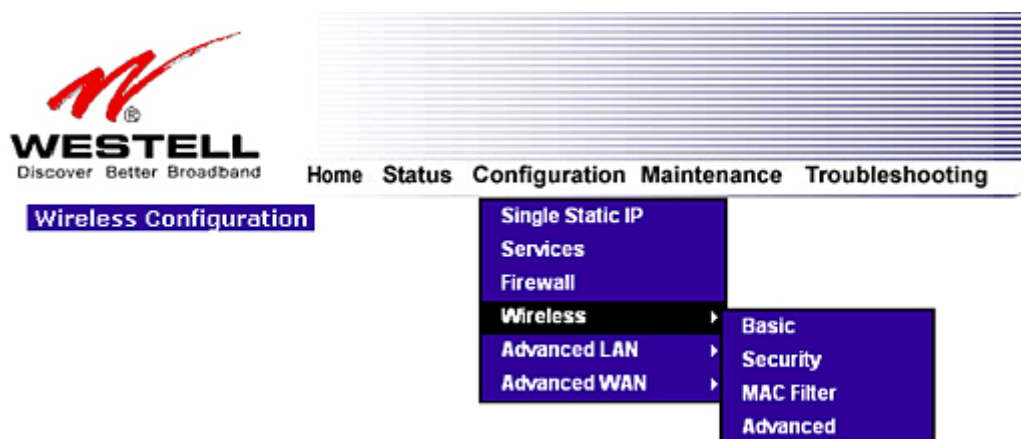

3. Select **Basic** from the **Wireless** menu.
4. Change the VersaLink's SSID by entering a new name for your wireless home network in the **Network Name (SSID)** field. The SSID is case sensitive and cannot exceed 32 characters.

The image shows a 'Wireless Configuration' window with a dark blue header. The settings are as follows:

Wireless Operation	Enabled
Network Name (SSID)	WestellNet
Channel	6
Mode	11g only
4x Support	Disabled
Hide SSID	Enabled

At the bottom, there are two blue buttons: 'save' and 'reset'.

5. Confirm that **Enabled** is selected in the **Hide SSID** drop-down list and click **Save**. [\[Show Me\]](#)

The image shows a 'Wireless Configuration' window with a dark blue header. The settings are as follows:

Wireless Operation	Enabled
Network Name (SSID)	HomeNet
Channel	6
Mode	11g only
4x Support	Disabled
Hide SSID	Enabled

At the bottom, there are two blue buttons: 'save' and 'reset'.

6. Close the VersaLink gateway configuration window.