

Variable Term Agreement (VTA) Job Aid

The purpose of this document is to assist with the successful population of the Variable Term Agreement (VTA) field on the Access Ordering Service Request (ASR).


The VTA Field allows the customer to provide Verizon with the length of a billing contract for a specific service.

Outlined below is a complete set of valid entries for the VTA field. The format of VTA field may vary by the region. Using the correct entry can reduce potential errors on the ASR and result in the accurate charge appearing on your bill.

TABLE OF CONTENTS

TABLE OF CONTENTS	2
VERIZON TERRITORY MAP	3
WEST	4
VTA FIELDS	4
WEST VTA FIELDS	5
DSR	5
GIGE ON DSR	11
INTELLILIGHT OPTICAL TRANSPORT (IOTS)	12
VZON	14
CUSTOM CONNECT, EXPRESS CONNECT & FLEX EXPRESS CONNECT	15
BAND SONET TRANSPORT RIDING CC, EC, & FEC	16
DS3	18
DS1	20
FOUR WIRE VOICE GRADE & DIGITAL SERVICE RATE	22
SOUTH	23
VTA FIELDS	23
SOUTH VTA FIELDS	24
SPECIAL & SWITCHED ACCESS	24
PAVA SPECIAL ACCESS FPP & FRACTIONAL DS1 OPP	26
PAVA SPECIAL ACCESS DS1 TPP	27
PAVA SPECIAL ACCESS DS1 TVP	28
PAVA SPECIAL ACCESS DS1 ETTVP	29
PAVA SPECIAL ACCESS DS3	30
NORTH	31
VTA FIELDS	31
NORTH VTA FIELDS	32
DS1, DS3, IDSR, DSR, IOTS, & IBT	32
IEF, ISSP, ISAN, & VZON	33

Verizon Footprint

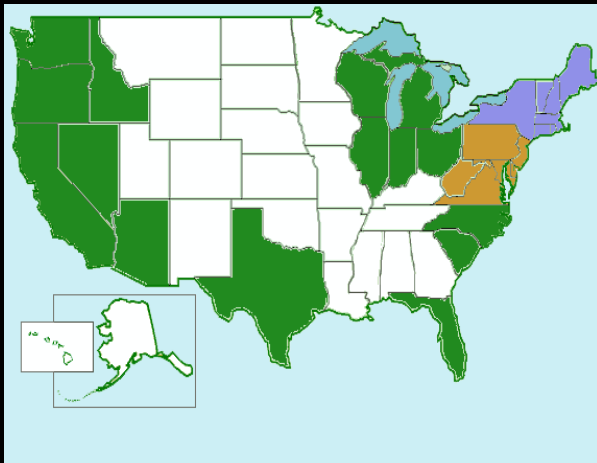

- Purple = Verizon East (North) <former NYNEX>
- Brown = Verizon East (South) <former Bell Atlantic>
- Green = Verizon West <former GTE>

WEST

VTA FIELDS

The following states are included in the West region:

ARIZONA
CALIFORNIA
FLORIDA
IDAHO
ILLINOIS
INDIANA
MICHIGAN
NEVADA
NORTH CAROLINA
OHIO
OREGON
SOUTH CAROLINA
TEXAS
WASHINGTON
WISCONSIN

WEST VTA FIELDS

DSR

DEDICATED SONET RING (DSR) – FCC 14 SECTIN 20 & FCC 16 SECTION 20

DSR Ring – VTA Field	Description
3DR	3-year term
5DR	5-year term
7DR	7-year term

DSR RINGS – SUBSEQUENT NODE – FCC 14 SECTION 20 & FCC 16 SECTION 20

DSR Ring Subsequent Node - VTA Field	Description
3DRA	3-year term
5DRA	5-year term
7DRA	7-year term

PARTIAL DSR RINGS – FCC 14 SECTION 20 & FCC 16 SECTION 20

Partial DSR Ring – VTA Field	Description
3PR	3-year term
5PR	5-year term
7PR	7-year term

PARTIAL DSR RINGS – SUBSEQUENT NODE - FCC 14 SECTION 20 & FCC 16 SECTION 20

Partial DSR Ring - Subsequent Node - VTA Field	Description
3PA	3-year term
5PA	5-year term
7PA	7-year term

WEST VTA FIELDS

DSR

DSR RING – RIDERS (DS1 & DS3) FCC 14 SECTION 5 & FCC 16 SECTION 7

The below choice of either VTA or EBP is dependant on the product being ordered and if a payment plan is required for the product itself.

If the order is requesting a DS1 or DS3, the PORT VTA information will be required in the VTA field when both terminating ends of the DS1 or DS3 are terminating at a location that is on the DSR Ring (on-ring).

For both DS1 and DS3 service orders, the EBP will be required to be populated with the below table #2 information for the DSR PORT to be charged to the rider service appropriately when the DS1 or DS3 is terminating at a location not on the DSR ring itself (off-ring), regardless if the VTA is populated or not (for DS1 month to month only).

DS3 always requires a payment plan agreement; therefore, the VTA field will always require the DS3 VTA payment plan information for an off-ring termination point.

An example for an off-ring DS3 for 3 years, Individual Protected First service, would have the possibility of 36PF01, depending on the plan agreement. The EBP in this example would then have one of the options below when CFA is provided for the below facility type.

VTA = 36PF01
CFA = OC12 DSR ring
EBP = 36PT2

Table 1 below is to be used in conjunction with table 2. Table 2 gives detail of the options allowed from the basic information provided in Table 1.

Table 1

VTA or EBP Position 1	VTA or EBP Position 2, 3	VTA or EBP Position 4
0 – Month to Month Term	PT = Ports	1 = rides OC3
3 –3 Year Term	TM = Transmux Port	2 = rides OC12
5 –5 Year Term	SN = Subtending Node	3 = rides OC48
7 –7 Year Term		4 = rides OC192

WEST VTA FIELDS

DSR

DSR SUBTENDING SERVICE RIDERS – PORT CHART – FCC 14 SECTION 20 & FCC 16 SECTION 20

Table 2

Ports On Node	VTA Values
DS1 at OC3 Node	0PT1 3PT1 5PT1 7PT1
DS1 at OC12 Node	0PT2 3PT2 5PT2 7PT2
DS1 at OC48 Node	0PT3 3PT3 5PT3 7PT3
DS1 at OC192 Node	0PT4 3PT4 5PT4 7PT4
DS3 or STS1 at OC3 Node	0PT1 3PT1 5PT1 7PT1
DS3 or STS1 at OC12 Node	0PT2 3PT2 5PT2 7PT2
DS3 or STS1 at OC48 Node	0PT3 3PT3 5PT3 7PT3
DS3 or STS1 at OC192 Node	0PT4 3PT4 5PT4 7PT4

WEST VTA FIELDS

DSR

DSR SUBTENDING SERVICE RIDERS – PORT CHART

Ports On Node	VTA Values
DS3 Transmux at OC3 Node	0TM1 3TM1 5TM1 7TM1
DS3 Transmux at OC12 Node	0TM2 3TM2 5TM2 7TM2
DS3 Transmux at OC48 Node	0TM3 3TM3 5TM3 7TM3
DS3 Transmux at OC192 Node	0TM4 3TM4 5TM4 7TM4
OC3 at OC12 Node	0PT2 3PT2 5PT2 7PT2
OC3 at OC48 Node	0PT3 3PT3 5PT3 7PT3
OC3 at OC192 Node	0PT4 3PT4 5PT4 7PT4
OC12 at OC48 Node	0PT3 3PT3 5PT3 7PT3
OC12 at OC192 Node	0PT4 3PT4 5PT4 7PT4
OC48 at OC192 Node	0PT4 3PT4 5PT4 7PT4

WEST VTA FIELDS

DSR

DSR SUBTENDING SERVICE RIDERS – PORT CHART

Ports On Node	VTA Values
OC3c AT OC12 Node	0PT2 3PT2 5PT2 7PT2
OC3c AT OC48 Node	0PT3 3PT3 5PT3 7PT3
OC3c at OC192 Node	0PT4 3PT4 5PT4 7PT4
OC12c at OC48	0PT3 3PT3 5PT3 7PT3
OC12c AT OC192	0PT4 3PT4 5PT4 7PT4
OC48c at OC192 Node	0PT4 3PT4 5PT4 7PT4

NOTE: EBP Field – DS3 Transmux – off DSR Ring: DS3s may have payment plans applicable for their Special Access Line, the VTA field on the ASR form will reflect the SAL payment plan and the EBP field on the same form will reflect the Port or Transmux.

WEST VTA FIELDS

DSR

DSR SUBTENDING NODE FACILITY – FCC 14 SECTION 20 & FCC 16 SECTION 20

EXAMPLE: 3SN2 = 3 year term, subtending node at OC12 DSR NODE

Service Type Bandwidth Subtending node	VTA 3 Year	VTA 5 Year	VTA 7 Year
OC3	3SN2 At OC12 DSR Node	5SN2 At OC12 DSR Node	7SN2 At OC12 Node
	3SN3 At OC48 DSR Node	5SN3 At OC48 DSR Node	7SN3 At OC48 Node
	3SN4 At OC192 DSR Node	5SN4 At OC192 DSR Node	7SN4 At OC3 192 Node
OC12	3SN3 At OC48 DSR Node	5SN3 At OC48 DSR Node	7SN3 At OC48 Node
	3SN4 At OC192 DSR Node	5SN4 At OC192 DSR Node	7SN4 At OC3 192 Node
OC48	3SN4 At OC192 DSR Node	5SN4 At OC192 DSR Node	7SN4 At OC3 192 Node

WEST VTA FIELDS

GIGE ON DSR

GIGE ON DSR – FCC 14 SECTION 20 & FCC 16 SECTION 20

Speed	VTA M-M	VTA 3 year	VTA 5 year	VTA 7 year
GlgE-1 on OC3 OC12 OC48 OC192	0PT1 0PT2 0PT3 0PT4	3PT1 3PT2 3PT3 3PT4	5PT1 5PT2 5PT3 5PT4	7PT1 7PT2 7PT3 7PT4
GlgE-3 on OC12 OC48 OC192	0PT2 0PT3 0PT4	3PT2 3PT3 3PT4	5PT2 5PT3 5PT4	7PT2 7PT3 7PT4
GlgE-6 on OC12 OC48 OC192	0PT2 0PT3 0PT4	3PT2 3PT3 3PT4	5PT2 5PT3 5PT4	7PT2 7PT3 7PT4
GlgE-9 on OC12 OC48 OC192	0PT2 0PT3 0PT4	3PT2 3PT3 3PT4	5PT2 5PT3 5PT4	7PT2 7PT3 7PT4
GlgE-12 on OC12 OC48 OC192	0PT3 0PT4	3PT3 3PT4	5PT3 5PT4	7PT3 7PT4
GlgE-24 on OC12 OC48 OC192	0PT3 0PT4	3PT3 3PT4	5PT3 5PT4	7PT3 7PT4

WEST VTA FIELDS

INTELLILIGHT OPTICAL TRANSPORT (IOTS)

INTELLILIGHT OPTICAL TRANSPORT SERVICE (IOTS) – FCC 14 SECTION 20 & FCC 16 SECTION 20

Service Type	VTA Values for Custom Connect
IOTS Ring – Primary	36PD, 60PD, 84PD
IOTS Ring – Expansion	36XD, 60XD, 84XD
Multi-Port Interface Facility - Unprotected	36DU, 60DU, 84DU
Multi-Port Interface Facility Protected	36DP, 60DP, 84DP

IOTS OPTICAL TRANSPORT CHANNEL FOR RIDERS – FCC 14 SECTION 20 & FCC 16 SECTION 20

The below choice of either VTA or EBP is dependant on the product being ordered and if a payment plan is required for the product itself.

The VTA must be the payment plan for the optical service being ordered on the ASR, example Custom Connect.

The EBP will be required with the channel interface in the Optical Transport Channel, Data Optical Transport Channel and Multi-Port Channel tables below.

OPTICAL Transport Channel	VTA Entries
OC3 – Unprotected OC3c – Unprotected OC12 – Unprotected OC12c – Unprotected OC48 – Unprotected OC48c – Unprotected	36DU, 60DU, 84DU
OC3 – Protected OC3c – Protected OC12 – Protected OC12c – Protected OC48 – Protected OC48c – Protected	36DP, 60DP, 84DP

WEST VTA FIELDS

INTELLILIGHT OPITICAL TRANSPORT (IOTS)

IOTS DATA TRANSPORT CHANNEL FOR RIDERS – FCC 14 SECTION 20 & FCC 16 SECTION 20

DATA Optical Transport Channel	VTA Entries
ESCON – Unprotected FICON – Unprotected Fiber Channel 1.0625 Gbps – Unprotected Fiber Channel 531 Mbps – Unprotected ISC – Unprotected Gigabit Ethernet – Unprotected Fast Ethernet – Unprotected	36DU, 60DU, 84DU
ESCON – Protected FICON – Protected Fiber Channel 1.0625 Gbps – Protected Fiber Channel 531 Mbps – Protected ISC – Protected Gigabit Ethernet – Protected Fast Ethernet – Protected	36DP, 60DP, 84DP

IOTS MULTI-PORT FACILITY CHANNEL FOR MULTI-PORT RIDERS – FCC 14 SECTION 20 & FCC 16 SECTION 20

Multi-Port Channel	VTA Entries
ESCON – Unprotected on Multi-Port Fiber Channel 266 Mbps - Unprotected on Multi-Port Fiber Channel 133 Mbps – Unprotected on Multi-Port Fast Ethernet – Unprotected on Multi-Port FDDI – Unprotected D1 Video – Unprotected on Multi-Port	36DU, 60DU, 84DU
ESCON – Protected on Multi-Port Fiber Channel 266 Mbps - Protected on Multi-Port Fiber Channel 133 Mbps – Protected on Multi-Port Fast Ethernet – Protected on Multi-Port FDDI – Protected on Multi-Port D1 Video – Protected on Multi-Port	36DP, 60DP, 84DP

WEST VTA FIELDS

VZON

VERIZON OPTICAL NETWORK – FCC 14 SECTION 20 & FCC 16 SECTION 20

Verizon Optical Networking (formerly VON), services may be ordered with a 1, 3, 5 or 7 year term payment plan. If the VON service is MAPPED to a SONET service, the term commitment for VON must match the term commitment for The SONET products. If 12TP is applied to the VON order MAPPING to DSR (Dedicated SONET Ring), then the month-to-month DSR Port charge will apply; DSR, formerly E-IDSR, (3, 5, and 7 year plan) does not have a 1-year term commitment. See FCC Tariff #14 and/or FCC Tariff #16, section 20 for the IOTS and DSR payment plan options.

Customer Commitment	VTA
12 months (1 year)	12TP
36 months (3 years)	36TP
60 months (5 years)	60TP
84 months (7 years)	84TP

WEST VTA FIELDS

CUSTOM CONNECT, EXPRESS CONNECT & FLEX EXPRESS CONNECT

CUSTOM CONNECT – FCC 14 SECTION 20 & FCC 16 SECTION 20

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	IS	Incremental SONET (CUSTOM CONNECT)

EXPRESS CONNECT – FCC 14 SECTION 20 & FCC 16 SECTION 20

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	EF EA	Express First system Express Additional system

WEST VTA FIELDS

BAND SONET TRANSPORT RIDING CC, EC, & FEC

BAND SONET TRANSPORT RIDING CUSTOM CONNECT, EXPRESS CONNECT OR FLEX EXPRESSCONNECT – FCC 14 SECTION 20 & FCC 16 SECTION 20

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	BD	Band SONET Transport

DS3 – INDIVIDUAL, THREE SYSTEM & UNLIMITED SYSTEM PAYMENT PLANS – FCC 14 SECTION 5

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	Protected Group and SAL Indicator	P = Protected G = Group F = First S = Additional Valid Entries: PF = Protected First System PS = Protected Subsequent System BD = BANDSONET Transport (FCC 14 section 20) GV = GOVERNMENT (will not need positions 5 through 8 populated) EI = CROSS CONNECTS (FCC 14 section 17)
5 & 6	System Capacity	01 = Individual System 03 = Three System UL = Unlimited System

WEST VTA FIELDS

BAND SONET TRANSPORT RIDING CC, EC, & FEC

EBP FIELD – INDIVIDUAL, THREE SYSTEM & UNLIMITED SYSTEM PAYMENT PLANS – FCC 14 SECTION 5– DS3 WITHOUT CFA OF DSR

EBP Position	EBP Field Definition	Valid Values
1	Protected Group	P = Protected G = Group
2	SAL Indicator	F = First S = Additional
3 & 4	System Capacity	01 = Individual System 03 = Three System UL = Unlimited System 12 = Group 12 System 24 = Group 24 System

WEST VTA FIELDS

DS3

DS3 – INDIVIDUAL, THREE SYSTEM & UNLIMITED SYSTEM PAYMENT PLANS – FCC 16 SECTION 7

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	Protected Group and SAL Indicator	P = Protected G = Group F = First S = Additional Valid Entries: PF = Protected First System PS = Protected Subsequent System GV = GOVERNMENT (will not need positions 5 through 8 populated) EI = CROSS CONNECTS (FCC 16 section 17)
5 & 6	System Capacity	01 = Individual System (same as stand-alone) 03 = Three System 12 = Twelve System UL = Unlimited System

EBP FIELD – DS3 WITHOUT CFA OF DSR – FCC 16 SECTION 7

EBP Position	EBP Field Definition	Valid Values
1	Protected Group	P = Protected G = Group
2	SAL Indicator	F = First S = Additional
5 & 6	System Capacity	01 = Individual System (same as stand-alone) 03 = Three System 12 = Twelve System UL = Unlimited System

WEST VTA FIELDS

DS3

DS3 – TERM VOLUME PLAN (TVP) – FCC 14 SECTION 5

For DS3 TVP, the PF01 or PS01 is required to be used in the VTA/EBP fields from the customer. The Account Manager MUST inform the West EXACT team of the DS3 TVP contract for DS3 TVP, which will then be applied to the customer service order. Verizon West EXACT system will be able to identify if the Account Manager has signed the customer for a DS3 TVP contract and requested the mechanization and the system will apply the appropriate DS3 TVP plan to the service order. DS3 TVP

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	36 = 3 Year Plan 60 = 5 Year Plan 84 = 7 Year Plan
3 & 4	Protected SAL Indicator	P = Protected F = First S = Additional Valid Entries: PF = Protected First System PS = Protected Subsequent System
5 & 6	System Capacity	01 = Individual System

EBP FIELD – DS3 WITHOUT CFA FOR IOTS OR DSR

EBP Position	EBP Field Definition	Valid Values
1	Protected	P = Protected
2	SAL Indicator	F = First S = Additional
5 & 6	System Capacity	01 = Individual System (same as stand-alone)

WEST VTA FIELDS

DS1

FRACTIONAL DS1 – OPTIONAL PAYMENT PLAN (OPP) – FCC 16 SECTION 7

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	DS1 OPP - 12 = 1 Year Plan - 24 = 2 Year Plan - 36 = 3 Year Plan - 60 = 5 Year Plan
3 & 4	Billing Plan	FO = OPP First SAL (Fractional DS1) AO = OPP Additional SAL (Fractional DS1)

DS1 – TERM PAYMENT PLAN (TPP) – FCC 16 SECTION 7

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	TPP Service: - 12 = 1 Year Plan - 24 = 2 Year Plan - 36 = 3 Year Plan - 60 = 5 Year Plan
3 & 4	Billing Plan	TP = TPP

DS1 –FEDERAL PAYMENT PLAN (FPP) – FCC 14 SECTION 11 AND FCC 16 SECTION 10

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	DS1 FPP Service: - 3 = 3 Year Plan - 5 = 5 Year Plan - 6 to15 = 6 to 15 Year Plan
3 & 4	Billing Plan	FP = FPP

WEST VTA FIELDS

DS1

DS1 TERM VOLUME PLAN (TVP) & EIGHT AND TEN YEAR TERM VOLUME PLAN (ETTVP) FCC 14 SECTION 5

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	12 = 1 Year Plan 24 = 2 Year Plan 36 = 3 Year Plan 60 = 5 Year Plan 96 = 8 Year Plan 120 = 10 Year Plan
3 & 4	Billing Plan	TV = Term Volume Plan
5 to 10	Minimum Number of SAL Threshold	2 = 2 - 60 Threshold 61 = 61 – 120 Threshold 121 = 121 – 240 Threshold 241 = 241 – 500 Threshold 501 = 501 – 1,000 Threshold 1001 = 1,001 – 3,000 Threshold 3001 = 3,001 – 6,000 Threshold 6001 = 6,001 – 11,000 Threshold 11001 = 11,001 and above Threshold Thresholds for Eight and Ten Year DS1 Term Volume Plan (ETTVP) 8 Year ETTVP: 4000 = 4000 – 6000 Threshold 6001 = 6001 – 10,000 Threshold 10001 = 10,001 – 20,000 Threshold 20000 = 20,001 – 30,000 Threshold 30001 = 30,001 and above Threshold 10 Year ETTVP: 4000 = 4000 – 6000 Threshold 6001 = 6001 – 10,000 Threshold 10001 = 10,001 – 20,000 Threshold 20000 = 20,001 – 30,000 Threshold 30001 = 30,001 and above Threshold

WEST VTA FIELDS

FOUR WIRE VOICE GRADE & DIGITAL SERVICE RATE

FOUR WIRE VOICE GRADE & DIGITAL DATA SVC RATE STABILITY PLAN (RSP PLAN) FCC 14 SECTION 5

VTA Position	VTA Field Definition	Valid Values
1 & 2	Term Agreement	36 = 3 Year Plan 60 = 5 Year Plan
3 & 4	Billing Plan	RS = Rate Stability Plan

EBP Position	EBP Field Definition	Valid Values
1 & 2	Term Agreement	RS

SOUTH

VTA FIELDS

The following states are included in the South region:

DELAWARE
DISTRICT OF COLUMBIA
MARYLAND
NEW JERSEY
PENNSYLVANIA
VIRGINIA
WEST VIRGINIA

SOUTH VTA FIELDS

SPECIAL & SWITCHED ACCESS

SPECIAL & SWITCHED ACCESS

Service	VTA Values
Standard DS3 and DS3 on Muxed IBT	1DMMDDYY 3DMMDDYY 5DMMDDYY
IEF DS3	3DMMDDYY 5DMMDDYY
DS3 and DS3 Transmux on OC3 DSR	0TPP1 2TPP1 3TPP1 5TPP1
DS3 and DS3 Transmux on OC12 DSR	0TPP2 3TPP2 5TPP2
DS3 and DS3 Transmux on OC48 DSR	0TPP3 3TPP3 5TPP3
DS3 and DS3 Transmux on OC192 IDSR	0TPP4 3TPP4 5TPP4
Standard DS1	0TPP 2TPP 3TPP 5TPP 7TPP
DS1 on IBT	0TPP 3TPP 5TPP
DS1 on OC12 DSR	0TPP2 2TPP2 3TPP2 5TPP2
DS1 on OC48 DSR	0TPP3 2TPP3 3TPP3 5TPP3
DS1 on OC192 DSR	0TPP4 2TPP4 3TPP4 5TPP4

SOUTH VTA FIELDS

SPECIAL & SWITCHED ACCESS

NOTE:

VTA entry position 1 equals plan year.

1 or 0 = month-to-month

2 = 2 year plan

3 = 3 year plan

5 = 5 year plan

7 = 7 year plan

SOUTH VTA FIELDS

PAVA SPECIAL ACCESS FPP & FRACTIONAL DS1 OPP

FCC16 & 14 AND FRACTIONAL DS1 OPP - FCC 16 & FCC 14

Plan	Offered	VTA Position		Valid Entries	EBP Entry
Federal Payment Plan (FPP)	fGTE and fContel for PIU 0 (VA) and 100 for 3, 5 & 6-15 Year Terms	1 = Term Agreement (TA) If TA > 9 then positions 1 & 2 would equal the TA		3, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 or 15	FP
		2 & 3 = Type of Plan If TA > 9 then positions 3 & 4 would equal the type of plan		FP	
		4 thru 9 = Term Begin Date If TA > 9 then positions 5-10 would equal the term begin date		Month, Day & Year (MMDDYY)	
Optional Payment Plan (OPP)	fGTE and fContel for PIU 0 (VA) and 1, 3 & 5 Year Terms	1 = Term Agreement (TA)		1, 3 or 5	1, 3 or 5FO (First) or 1, 3 or 5AO (Subsequent)
		2 = "F" = 1 st appearance of DS1 at this location or = "A" = Subsequent appearance of a DS1 at this location	F or A		
		3 = "O" for Optional	O		
		4 thru 9 = Term Begin Date	Month, Day & Year (MMDDYY)		

SOUTH VTA FIELDS

PAVA SPECIAL ACCESS DS1 TPP

DS1 TERM PAYMENT PLAN (TPP) - FCC 16

Plan	Offered	VTA Position	Valid Values	EBP Entry
Term Payment Plan (TPP)	fContel only for PIU 100 and 1, 2, 3 & 5 Year Terms	1 = Term Agreement	1, 2, 3 or 5	N/A
		2 & 3 = Type of Plan	TP	
		4 thru 9 = Term Begin Date	Month, Day & Year (MMDDYY)	

Note: EBP is not applicable if SECLOC is in CLLI format.

NOTE:

- Switched Access Term Plans not available if ACTL is WV (fBA)
- Switched Term Plans only available in Interstate Tariff (fBA)
- Switched Term Plans not offered in fGTE/Contel Tariffs (fGTE)

SOUTH VTA FIELDS

PAVA SPECIAL ACCESS DS1 TVP

TERM VOLUME PLAN (TVP) - FCC 14

Plan	Offered	VTA Position	Valid Values	EBP Entry
Term Volume Plan (TVP) 1, 2, 3 & 5 Year Terms	fGTE only for PIU 100 and 1, 2, 3 & 5 Year Terms	1 = Term Agreement	1, 2, 3 or 5	N/A
		2 & 3 = Type of Plan	TV	
		4 thru 9 = Term Begin Date	Month, Day & Year (MMDDYY)	
		10 = - (Dash)	-	
		11+ = Volume: 2-60 61-120 121-240 241-500 501-1000 1001-3000 3001-6000 6001-11000 11001 and above	2, 61, 121, 241, 501, 1001, 3001, 6001, or 11001	

SOUTH VTA FIELDS

PAVA SPECIAL ACCESS DS1 ETTVP

EIGHT- AND TEN-YEAR TERM VOLUME PLAN (ETTVP) - FCC 14

Plan	Offered	VTA Position	Valid Values	EBP Entry
Term Volume Plan (TVP) 8 & 10 Year Terms	FGTE only for PIU 100 and 8 & 10 Year Terms	1 = Term Agreement (TA) If TA = 10 years then positions 1 & 2 would equal TA	8 or 10	N/A
		2 & 3 = Type of Plan If TA = 10 years then position 3 & 4 would equal type of plan	TV	
		4 thru 9 = Term Begin Date If TA = 10 years then positions 5 thru 10 would equal term begin date.	Month, Day & Year (MMDDYY)	
		10 = - (Dash) If TA = 10 years then position 11 would equal -	-	
		11+ = Volume If TA = 10 years then positions 12+ would equal volume Volume: 4000-6000 6001-10000 10001-20000 20001-30000 30001 and above	4000, 6001, 10001, 20001, 30001	

Note: EBP is not applicable if SECLOC is in CLLI format.

SOUTH VTA FIELDS

PAVA SPECIAL ACCESS DS3

Plan	Offered	VTA Position	Valid Values	EBP Entry
Payment Plan	fGTE only for PIU 100 and 1, 3, 5 & 7 Year Terms	1 = Term Agreement (TA)	1, 3, 5 or 7	PF01 or PF03 or PFUL or PS01 or PS03 or PSUL
		2 & 3 = "PF" = first appearance of DS3 at the primary location or "PS" = subsequent appearance of DS3 at the primary location	PF or PS	
		4 & 5 = Capacity 01 = Individual System 03 = 3 System UL = Unlimited System	01, 03 or UL	
		6 ^{thru} 11 = Term Begin Date	Month, Day & Year (MMDDYY)	
Payment Plan	fContel only for PIU 100 and 1, 3, 5 & 7 Year Terms	1 = Term Agreement	1, 3, 5 or 7	PF01 or PF03 or PF12 or PS01 or PS03 or PS12
		2 & 3 = "PF" = first appearance of DS3 at the primary location or "PS" = subsequent appearance of DS3 at the primary location	PF or PS	
		4 & 5 – Capacity 01 = Individual System 03 = Three System 12 = Twelve System	01, 03 or 12	
		6 thru 11 = Term Begin Date	Month, Day & Year (MMDDYY)	

Note: EBP is not applicable if SECLOC is in CLLI format.

NORTH

VTA FIELDS

The following states are included in the North region:

CONNECTICUT

MAINE

MASSACHUSETTS

NEW HAMPSHIRE

NEW YORK

RHODE ISLAND

VERMONT

NORTH VTA FIELDS

DS1, DS3, IDSR, DSR, IOTS, & IBT

Product	Term Payment Plan	Term Length	VTA Positions	Valid Entries
DS1	FCC 11	MTM	1 & 2	0 or Blank
		2 Year Plan		24
		3 Year Plan		36
		4 Year Plan		48
		5 Year Plan		60
		7 Year Plan		84
DS3	FCC 11	MTM	1 & 2	0 or Blank
		2 Year Plan		24
		3 Year Plan		36
		4 Year Plan		48
		5 Year Plan		60
		7 Year Plan		84
IntelliLight Dedicated Sonet Ring (IDSR) / Dedicated Sonet Ring (DSR)	FCC 1, 11, 14, 16	3 Year Plan	1 & 2	36
		5 Year Plan		60
		7 Year Plan		84
IntelliLight Optical Transport Services (IOTS)	FCC 1, 11, 14, 16	3 Year Plan	1 & 2	36
		5 Year Plan		60
		7 Year Plan		84
IntelliLight Broadband Transport (IBT)	FCC 1 and 11	Month to Month (MTM)	1 & 2	Blank or 12*
		3 Year Plan		36
		5 Year Plan		60

NORTH VTA FIELDS

IEF, ISSP, ISAN, & VZON

Product	Term Payment Plan	Term Length	VTA Positions	Valid Entries
IntelliLight Entrance Facility (IEF)	FCC 1 and 11	3 Year Plan	1 & 2	36
		5 Year Plan	1 & 2	60
IntelliLight Shared Single Path (ISSP)	FCC 1 and 11	MTM	1 & 2	Blank or 12*
		3 Year Plan		36
		5 Year Plan		60
IntelliLight Shared Assurance Network (ISAN)	FCC 1 and 11	5 Year Plan	1 & 2	60
Verizon Optical Networking (VzON)	FCC 1, 11, 14 and 16	1 Year Plan	1 & 2	12
		3 Year Plan		36
		5 Year Plan		60
		7 Year Plan		84

*Use a blank or 12 as a valid VTA entry for Month to Month Plans